


GA EDGE B LED

Spotlights



DESCRIPTION:	Track mounted adjustable LED spotlight Light distribution type: direct Optical system: faceted aluminium reflector, clear PMMA diffuser Housing: aluminium Colour: white, RAL9016; black, RAL9017
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 60000/L80B10 SDCM: 3 Protection class IEC: II Ingress protection code: IP20 Mechanical impact resistance: IK02 Operating temperature range, °C: ta 0...+35
INSTALLATION:	In 3-phase track. Track adaptor (3-phase + N) with phase selector
ENVIRONMENT:	Indoor
APPLICATION:	Retail, showroom, museum, exhibition, public place

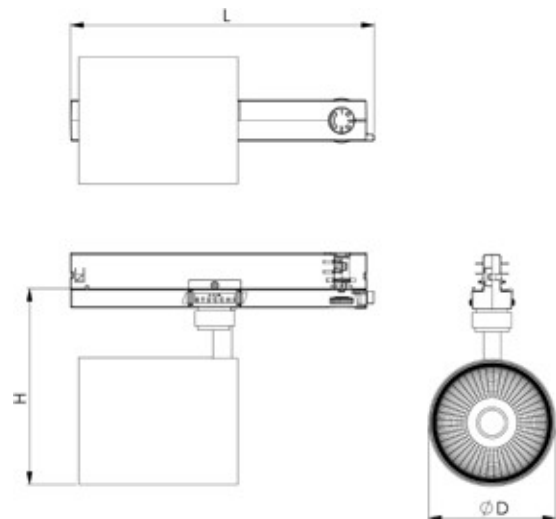

PRODUCT	LENGTH, mm	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
GA EDGE B LED1x1900 G603 T840 R40	170	82	164	1901	13,5	141	80+	4000	0,6
GA EDGE B LED1x2500 G604 T840 R40	170	82	164	2583	18,7	138	80+	4000	0,6
GA EDGE B LED1x3350 G605 T840 R40	170	82	164	3478	26,5	131	80+	4000	0,6
GA EDGE B LED1x4250 G606 T840 R40	234	99	180	4363	34,0	128	80+	4000	1,5
GA EDGE B LED1x4750 G667 T840 R40	234	99	180	4983	39,8	125	80+	4000	1,5

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. The manufacturer is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification


OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR
T830	R24	DALI ^{1 2}
T840	R40	BLT
T930	R60	KRBLT
T940		
T820 MEAT		
T831 MEAT&WHITE		
T825 BREAD		
T930 VEGETABLES		
T932 FASHION		
T931 FASHION&WHITE		
T927 NATURAL		
T930 NATURAL		
T940 NATURAL		


1 With DALI option, luminire length: 260mm

2 For this model DALI option is not compatible with switch-control dimming functionality

R24



R40



R60

