

# GLEAM A LED

## Spotlights




**DESCRIPTION:** Track mounted adjustable beam LED luminaire  
**Light distribution type:** direct  
**Optical system:** adjustable faceted reflector, 20-60°  
**Housing:** aluminium  
**Colour:** white, RAL9016; black, RAL9017

**GENERAL DATA:** **Mains voltage:** 220-240V, 0/50-60Hz  
**LED lifetime, h:** 60000/L80B10  
**SDCM:** 3  
**Protection class IEC:** II  
**Ingress protection code:** IP20  
**Mechanical impact resistance:** IK02  
**Operating temperature range, °C:** ta 0...+35

**INSTALLATION:** In 3-phase track. Track adaptor (3-phase + N) with phase selector

**ENVIRONMENT:** Indoor

**APPLICATION:** Retail, showroom, exhibition, public place

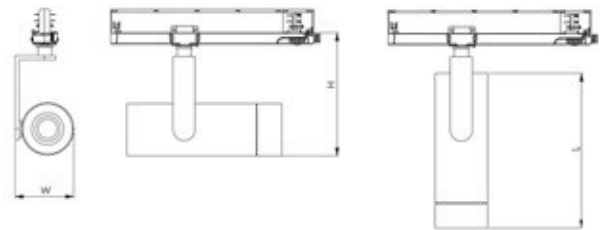


| PRODUCT                            | LENGTH, mm | WIDTH, mm | HEIGHT, mm | LUMINAIRE OUTPUT*, lm | SYSTEM POWER*, W | SYSTEM EFFICACY*, lm/W | CRI | CCT*, K | WEIGHT, kg |
|------------------------------------|------------|-----------|------------|-----------------------|------------------|------------------------|-----|---------|------------|
| GLEAM A LED1x1950 J440 T840 R20-60 | 190        | 92        | 160        | 1946                  | 13,5             | 144                    | 80+ | 4000    | 1,1        |
| GLEAM A LED1x2600 J441 T840 R20-60 | 190        | 92        | 160        | 2644                  | 18,7             | 141                    | 80+ | 4000    | 1,1        |
| GLEAM A LED1x3400 J442 T840 R20-60 | 190        | 92        | 160        | 3559                  | 26,5             | 134                    | 80+ | 4000    | 1,1        |
| GLEAM A LED1x4300 J443 T840 R20-60 | 190        | 92        | 160        | 4464                  | 34,0             | 131                    | 80+ | 4000    | 1,1        |

\*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. The manufacturer is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

### OPTIONS AVAILABLE ON REQUEST:

| LED             | CONTROL GEAR                         |
|-----------------|--------------------------------------|
| T830            | T930 VEGETABLES DALI <sup>1</sup>    |
| T840            | T932 FASHION BLT                     |
| T930            | T931 FASHION&WHITE KRBLT             |
| T940            | T927 NATURAL ROTARY DIM <sup>2</sup> |
| T820 MEAT       | T930 NATURAL                         |
| T831 MEAT&WHITE | T940 NATURAL                         |
| T825 BREAD      |                                      |

### R20-60



1 For this model DALI option is not compatible with switch-control dimming functionality  
 2 Rotary DIM option not applicable for model: J443

