


# SOLN POP



□ WHITE (RAL 9016)



**DESCRIPTION:** RECESSED LED PANEL  
**LIGHT DISTRIBUTION TYPE:** DIRECT  
**MATERIAL:** POWDER PAINTED ALUMINUM, OPAL OR MICROPRISM  
**COLOUR:** WHITE (RAL 9016),  
**GENERAL DATA:** MAINS VOLTAGE: 220-240V  
 LED LIFETIME, H: 100 000/L80B10  
 COLOR CONSISTENCY: 3-STEP MACADAM  
 WARRANTY : 5 YEARS  
 INGRESS PROTECTION CODE: IP50 / IP20  
 AVAILABLE DRIVERS: ON / OFF, DALI  
 LUMINAIRE OUTPUT (LM): 2 600 - 5 300  
 SYSTEM POWER (W): 20-40  
 SYSTEM EFFICACY (LM/W) : 130  
 COLOR TEMPERATURE (K) 3000K, 4000K, 5000K  
**INSTALLATION:** ON THE CEILING  
**ENVIRONMENT:** INDOOR  
**APPLICATION:** OFFICE, HALL, CORRIDOR, PUBLIC PLACE, SCHOOLS, HOSPITALS

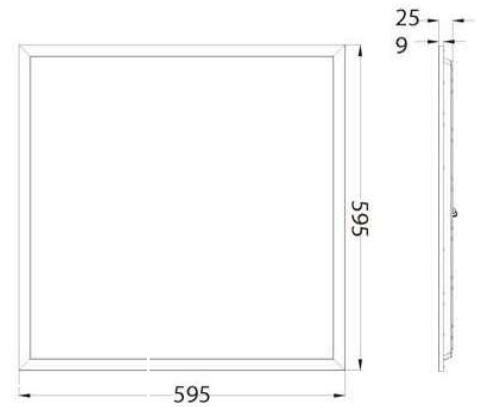

SUPPLIED WITH ADAPTED OPERATING DEVICE AND CORD WITH CONNECTION BOX FOR 0,75 - 2,5MM<sup>2</sup> CABLE.  
 QUICK CONNECTION BETWEEN OPERATING DEVICE AND LIGHT PANEL.  
 AVAILABLE IN 6 PACKS

Product	System Power (W)	System Luminous Flux (lm)	Color temperature (K)	Light distribution angle (°)
SOLN POP MP 6x6 FLEX 6P	20- / 25- / 30- / 35- / 40	2600 - 5100	3000 - 5000	90
SOLN POP MP 6x6 FLEX	20- / 25- / 30- / 35- / 40	2600 - 5100	3000 - 5000	90
SOLN POP OP 6x6 DALI 6P	39	5000	3000 - 5000	120
SOLN POP OP 6x6 DALI	39	5000	3000 - 5000	120
SOLN POP OP 6x6 FLEX 6P	20- / 25- / 30- / 35- / 40	2500 - 4800	3000 - 5000	120
SOLN POP OP 6x6 FLEX	20- / 25- / 30- / 35- / 40	2500 - 4800	3000 - 5000	120
SOLN POP MP 6x6 DALI 6P	39	5300	3000 - 5000	90
SOLN POP MP 6x6 DALI	39	5300	3000 - 5000	90

