

SPARK S LED

Emergency Lighting



TRACK



Supplied with universal sticker kit


DESCRIPTION: Surface mounted double-sided LED emergency exit sign
Light distribution type: omnidirectional
Optical system: clear PMMA diffuser
Housing: polycarbonate
Colour: white; light grey; black
Battery charging time: 24 hours (12 hours optional: AUT)
Battery: NiCd (LiFePO4 optional: AUT), deep discharge protection
Recognition distance: 25 meters

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 70000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP44
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+40 (CEBLED ta -25...+50)

INSTALLATION: On the ceiling, wall or suspended (suspension kit to be ordered separately). Screw terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Emergency exit sign

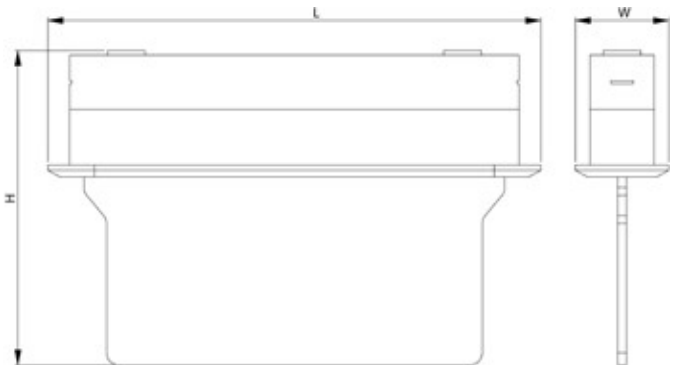

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	ILLUMINATION MODE	EMERGENCY OPERATING TIME, H	POWER IN EMERGENCY MODE, W*	CRI	CCT*, K	WEIGHT, kg
SPARK S 3PLED C434 TEST	299	43	206	M/NM	3	1	80+	6000	1,2
SPARK S 3PLED C434 AUT	299	43	206	M/NM	3	1	80+	6000	1,2
SPARK S CEBLED C435	299	43	206	CEB	x	1	80+	6000	1,0

*M - maintained (with an option of connecting as non-maintained), NM - non-maintained, CEB maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: ±10%, values apply to an ambient temperature of 25°C

OPTIONS AVAILABLE ON REQUEST:

EMERGENCY	CONNECTION
TEST	TRACK ¹
AUT	
CEB	
EMS	

¹ Only for non-maintained operation

AVAILABLE ACCESSORIES:

Product: Suspension MTG KIT SPARK LED (B/W)
Description: Suspension wire set, 1.5m adjustable (2pcs), black/ white

Product: Suspension MTG KIT SPARK LED (B/W)
Description: Suspension wire set, 3m adjustable (2pcs), black/ white

